

SPECIFICATIONS

Rated thermal input	6 kW
Efficiency	83 %
Smoke flue diameter	150 mm
Min. thrust (under pressure) for rated thermal input	12 Pa
Fuel gas temperature	194 °C
Volume of fuel gas	6,6 g/s
CO emissions in fuel gas (at 13 % O ₂)	0,0532 %
Dust in the fuel gas (at 13 % O ₂)	23 mg/Nm ³
Volume of fuel per hour	1,72 kg/h
Fuel	wood (beech logs)
Weight	142 kg



LIST OF SPARE PARTS


Glass

1x

300 x 300 x 668 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Back
4. Right side
5. Left side
6. Deflector
7. Cast iron grid
8. Ash tray

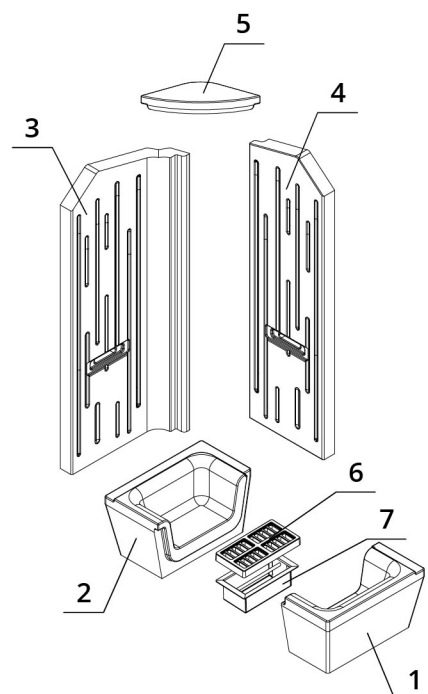

BEF ARIES 3 ER


BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

www.befhome.com

TECHNICAL DRAWING

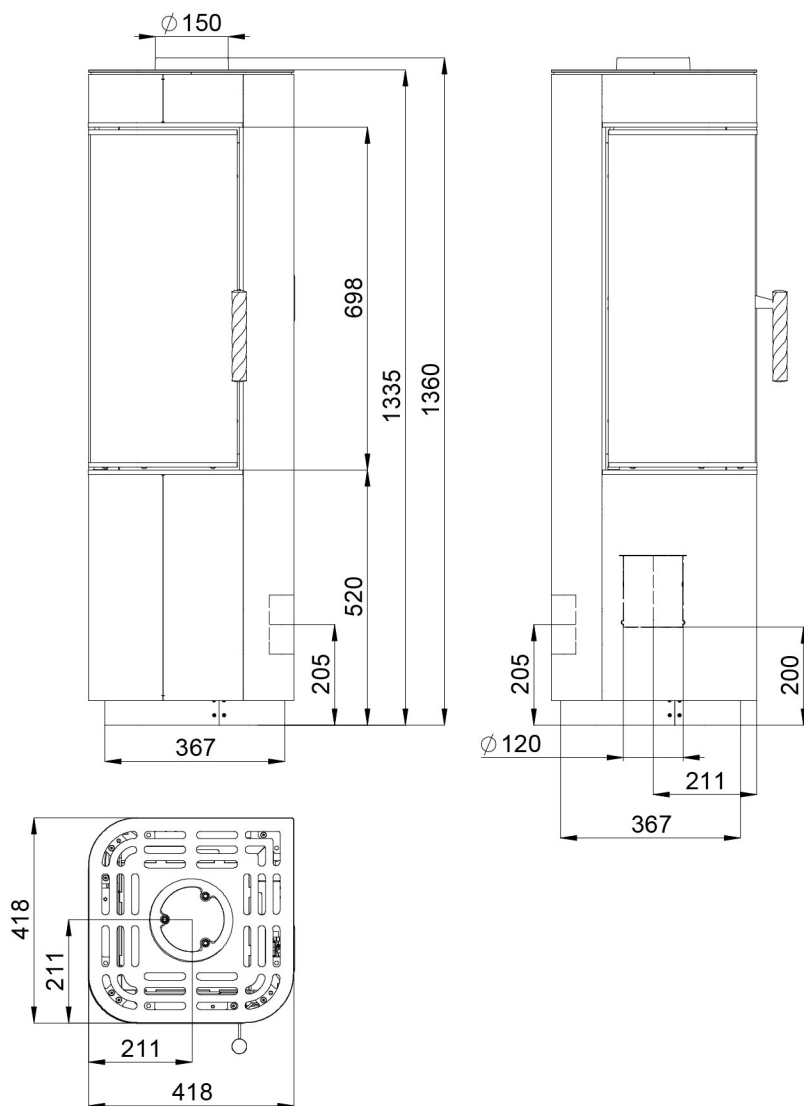

BEF ARIES 3 ER

BlmSchV
Stufe 2

15a
B - VG

ČSN EN
13229

www.befhome.com