BEF HOME
fire for your heart

SPECIFICATIONS

Rated thermal input	7 kW
Efficiency	82 %
Smoke flue diameter	150 mm
Min. thrust (under pressure) for rated thermal input	12 Pa
Fuel gas temperature	264 °C
Volume of fuel gas	5,6 g/s
CO emissions in fuel gas (at 13 % O_2)	0,0868 %
Dust in the fuel gas (at 13 % O_2)	19 mg/Nm^3
Volume of fuel per hour	2,05 kg/h
Fuel	wood (beech logs)
Weight	242 kg

LIST OF SPARE PARTS

Glass



600 x 340 x 468 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Back
4. Side
5. Deflector
6. Carcon blend

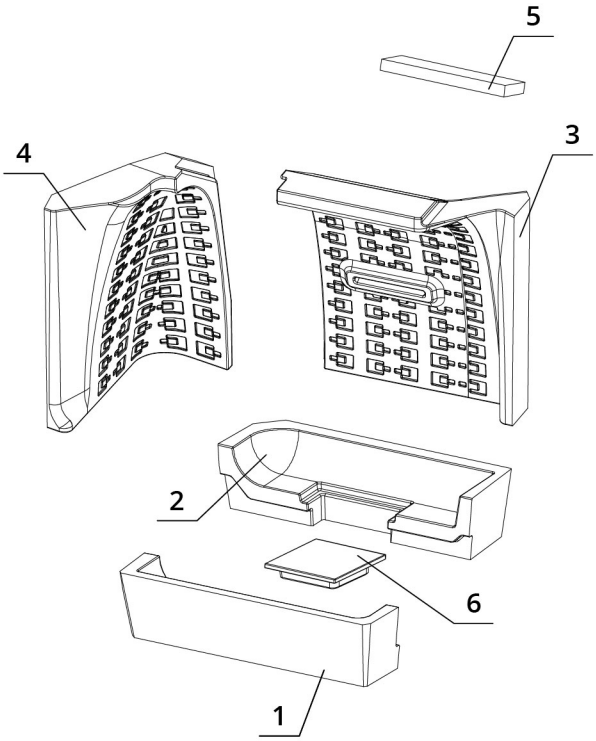

BEF ROYAL V 7 CP

BImSchV Stufe 2 | 15a B - VG | ČSN EN 13229 | eco design

www.befhome.com

BeF Home s. r. o. I Kotvrdovice 277, 679 07 Kotvrdovice I tel.: +420 516 428 240 I email: obchodnik@bef.cz

BEF HOME
fire for your heart

TECHNICAL DRAWING

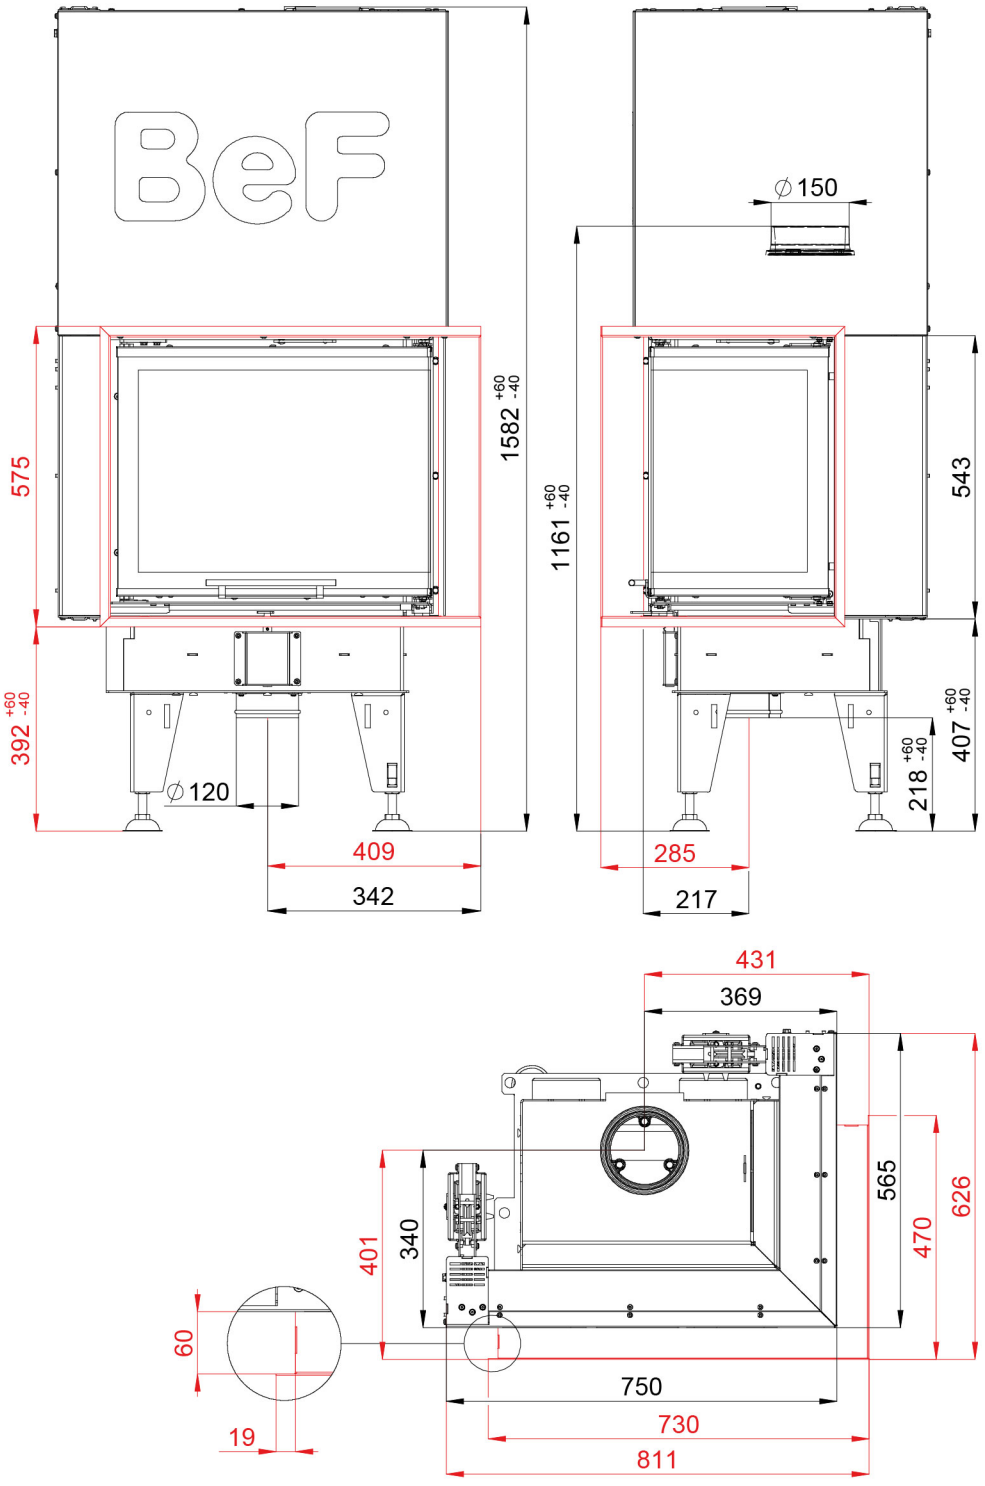

BEF ROYAL V 7 CP

BImSchV Stufe 2 | 15a B - VG | ČSN EN 13229 | eco design

www.befhome.com

BeF Home s. r. o. I Kotvrdovice 277, 679 07 Kotvrdovice I tel.: +420 516 428 240 I email: obchodnik@bef.cz