BEF HOME
fire for your heart

SPECIFICATIONS

Rated thermal input	13 kW
Efficiency	84 %
Smoke flue diameter	200 mm
Min. thrust (under pressure) for rated thermal input	12 Pa
Fuel gas temperature	235 °C
Volume of fuel gas	10,2 g/s
CO emissions in fuel gas (at 13 % O_2)	0,0877 %
Dust in the fuel gas (at 13 % O_2)	11 mg/Nm^3
Volume of fuel per hour	3,6 kg/h
Fuel	wood (beech logs)
Weight	243 kg

LIST OF SPARE PARTS

Glass



950 x 468 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Back
4. Right side
5. Left side
6. Deflector

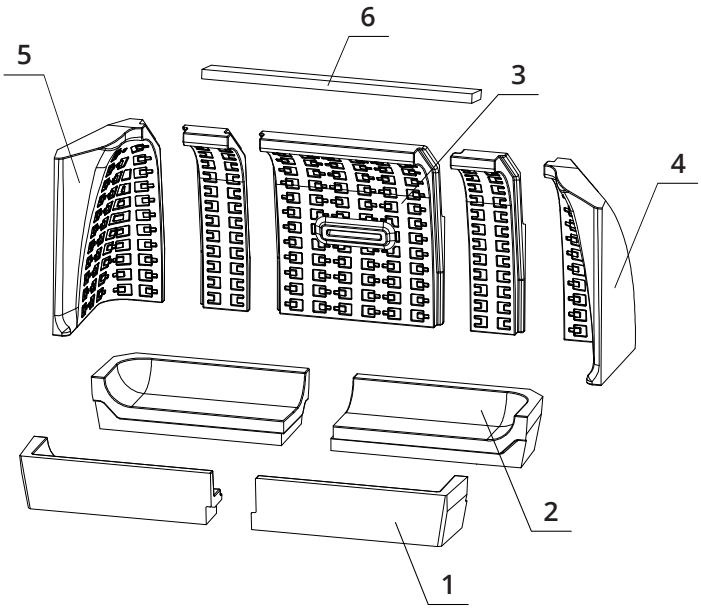

BEF THERM 10

BImSchV Stufe 2 | 15a B - VG | ČSN EN 16510 | eco design

www.befhome.com

BeF Home s. r. o. I Kotvrdovice 277, 679 07 Kotvrdovice I tel.: +420 516 428 240 I email: obchodnik@bef.cz

BEF HOME
fire for your heart

TECHNICAL DRAWING

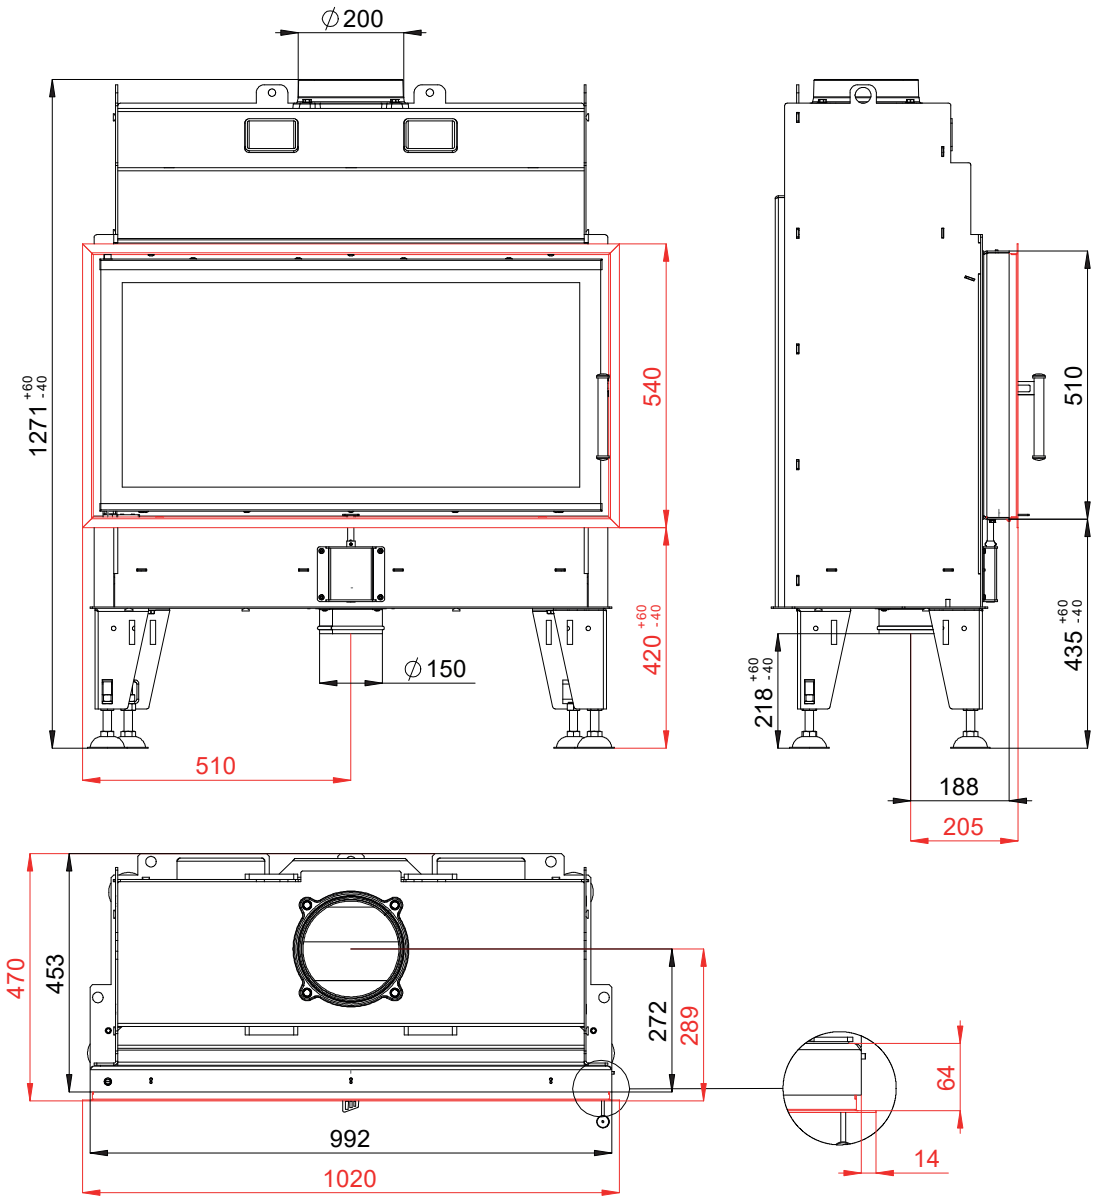

BEF THERM 10

BImSchV	15a	ČSN EN	eco design
Stufe 2	B - VG	16510	

www.befhome.com

BeF Home s. r. o. I Kotvrdovice 277, 679 07 Kotvrdovice I tel.: +420 516 428 240 I email: obchodnik@bef.cz