HOT WATER FIREPLACE INSERT BEF TWIN 10 N AQUATIC IN ACCORDANCE WITH EN 13 229

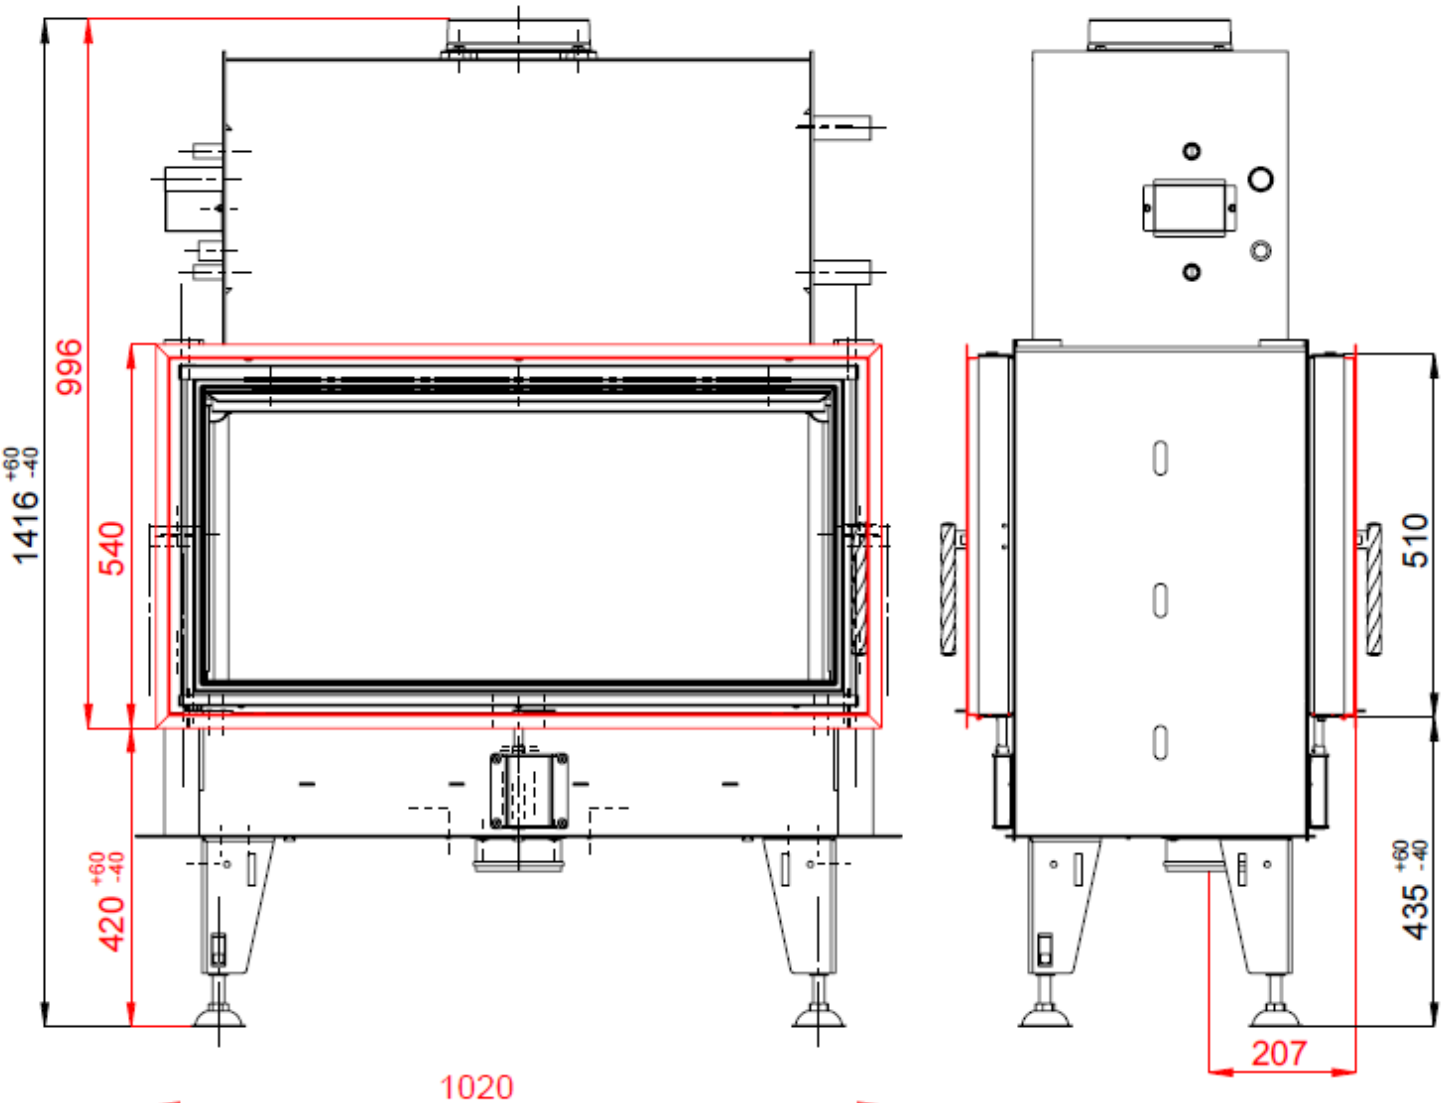

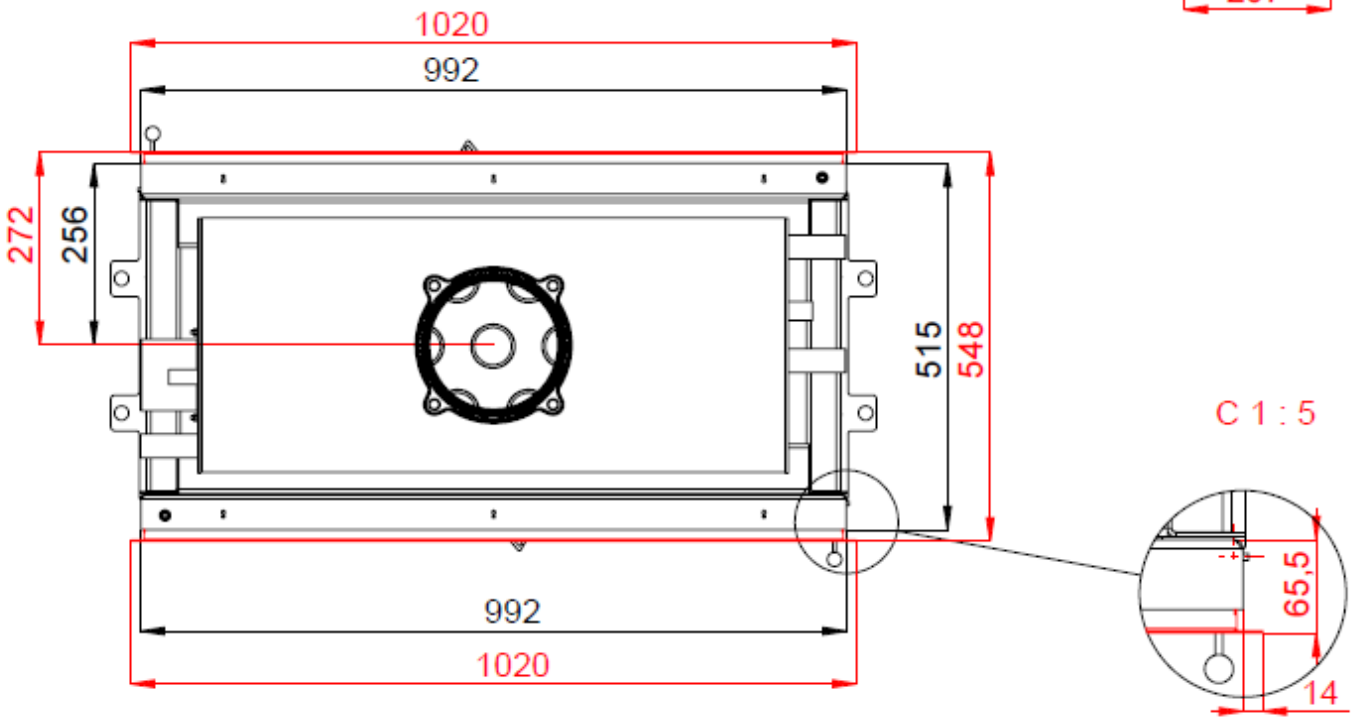

HOT WATER FIREPLACE INSERT BEF TWIN 10 N AQUATIC IN ACCORDANCE WITH EN 13 229

Technical data:

		Closed firebox
Nominal heat output	kW	20
Efficiency	%	85
Output into water	kW	6,6
Volume flow of combustion products	g/s	16,9
Flue-gas temperature	°C	204
Min. feed pressure at nominal heat output	Pa	10
Fuel		wood (beech logs)
Fuel consumption per hour	kg/h	6
CO emission in burnt gas (in relation to 13% O2)	%	0,0650
Dust in flue-gas (in relation to 13% O2)	mg/Nm^3	26
Smoke flue diameter	mm	200
Weight	kg	295

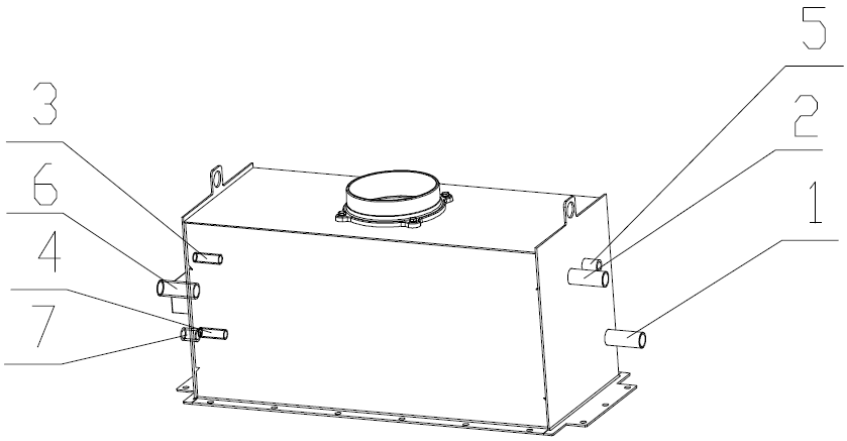

1 – Cold water input into water exchanger (reverse), external thread 1“
2 – Warm water output from water exchanger (rising pipe), external thread 1“
3 – Cold water input for coolant loop, external thread1/2“
4 – Warm water output from coolant loop, external thread 1/2“
5 – Input for air bleed valve, internal thread 1/2“
6 – Thermic security sensor, external thread 1“
7 – Pressure valve, internal thread 1/2“

Set of carcon firebox:

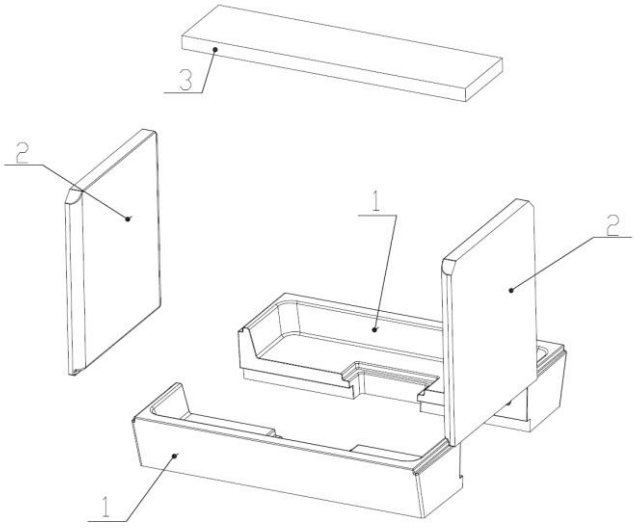

List of spare parts:

1. **Bottom**
2. **Side piece**
3. **Deflector**
4. **Cast iron grate**
5. **Ashtray**

For details see Installation and Service Instructions.