BEF HOME
fire for your heart

SPECIFICATIONS

Rated thermal input	14 kW
Efficiency	83 %
Smoke flue diameter	200 mm
Min. thrust (under pressure) for rated thermal input	10 Pa
Fuel gas temperature	242 °C
Volume of fuel gas	10,6 g/s
CO emissions in fuel gas (at 13 % O_2)	0,0981 %
Dust in the fuel gas (at 13 % O_2)	29 mg/Nm^3
Volume of fuel per hour	3,95 kg/h
Fuel	wood (beech logs)
Weight	358 kg

LIST OF SPARE PARTS

Glass



950 x 468 mm
950 x 468 mm

Carcon stones

1. Front bottom
2. Back bottom
3. Right side
4. Left side
5. Deflector

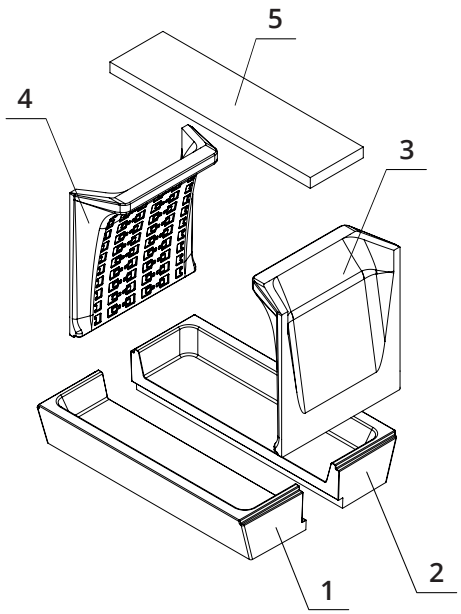

BEF TWIN V 10 II.

BImSchV Stufe 2 | 15a B - VG | ČSN EN 16510 | eco design

www.befhome.com

BeF Home s. r. o. I Kotvrdovice 277, 679 07 Kotvrdovice I tel.: +420 516 428 240 I email: obchodnik@bef.cz

BEF HOME
fire for your heart

TECHNICAL DRAWING

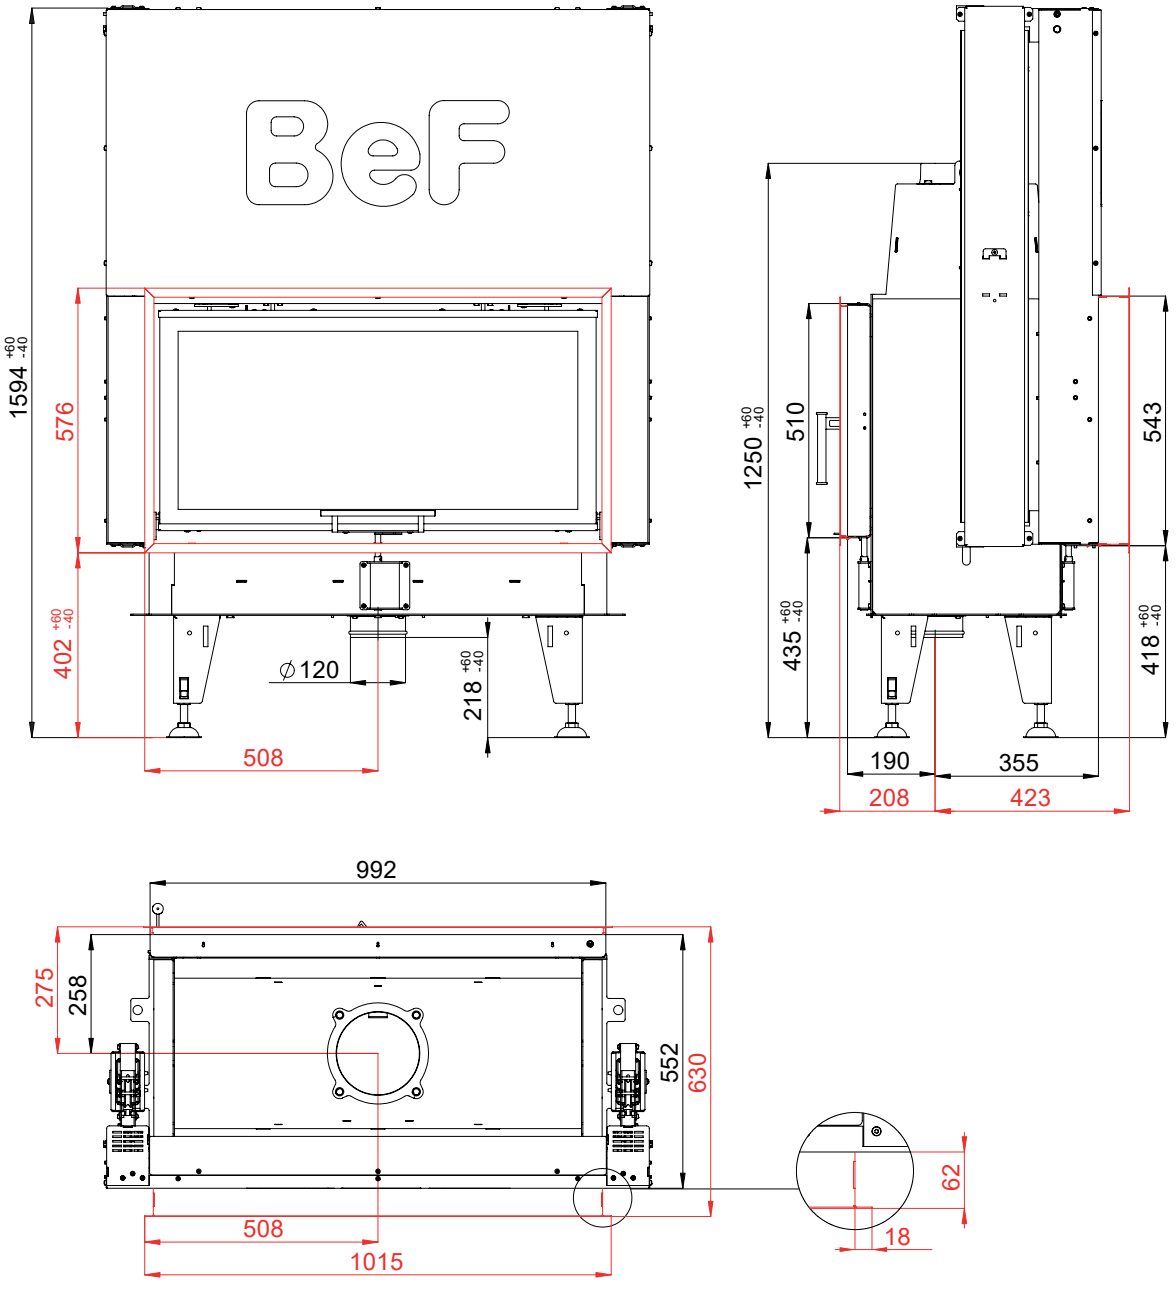

BEF TWIN V 10 II.

BImSchV Stufe 2 | 15a B - VG | ČSN EN 16510 | eco design

www.befhome.com

BeF Home s. r. o. I Kotvrdovice 277, 679 07 Kotvrdovice I tel.: +420 516 428 240 I email: obchodnik@bef.cz