


SPECIFICATIONS

| | |
|--|-----------------------|
| Rated thermal input | 8 kW |
| Efficiency | 85 % |
| Smoke flue diameter | 150 mm |
| Min. thrust (under pressure) for rated thermal input | 12 Pa |
| Fuel gas temperature | 212 °C |
| Volume of fuel gas | 6 g/s |
| CO emissions in fuel gas (at 13 % O ₂) | 0,0932 % |
| Dust in the fuel gas (at 13 % O ₂) | 16 mg/Nm ³ |
| Volume of fuel per hour | 2,54 kg/h |
| Fuel | wood (beech logs) |
| Weight | 137 kg |



LIST OF SPARE PARTS


Glass



750 x 468 mm

Carcon stones


1. Bottom
2. Back
3. Right side
4. Left side
5. Deflector

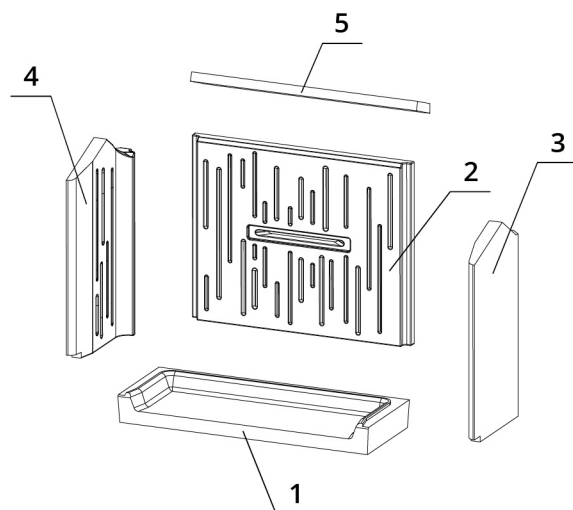

BEF EFFI 8

ČSN EN
13229

TECHNICAL DRAWING

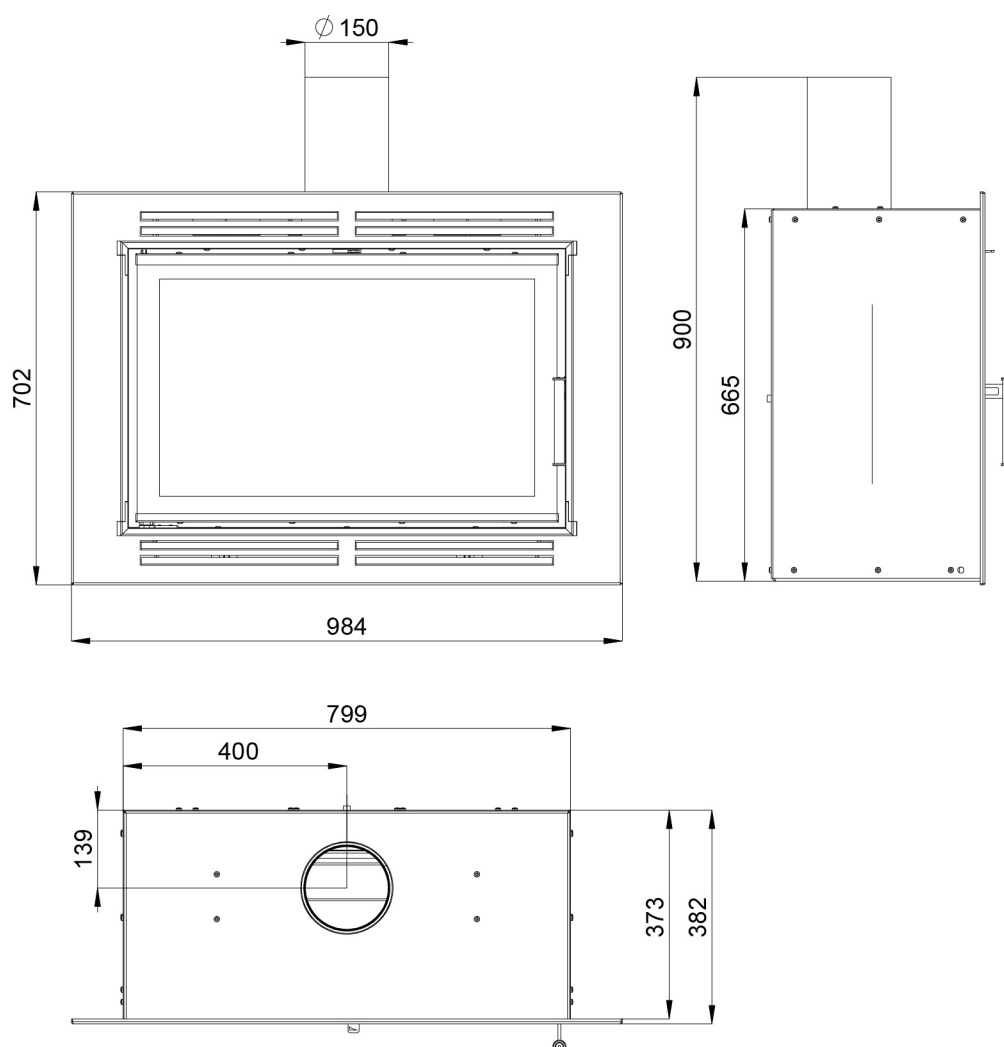

BEF EFFI 8

ČSN EN
13229

www.befhome.com